


Technical drawing of a square flange with a central hole and eight mounting holes. The drawing includes dimensions: 60 for the outer square, 45° for the chamfered corners, 60 for the inner square, and 4-M4x10 for the mounting holes. A central hole is labeled Ø70.

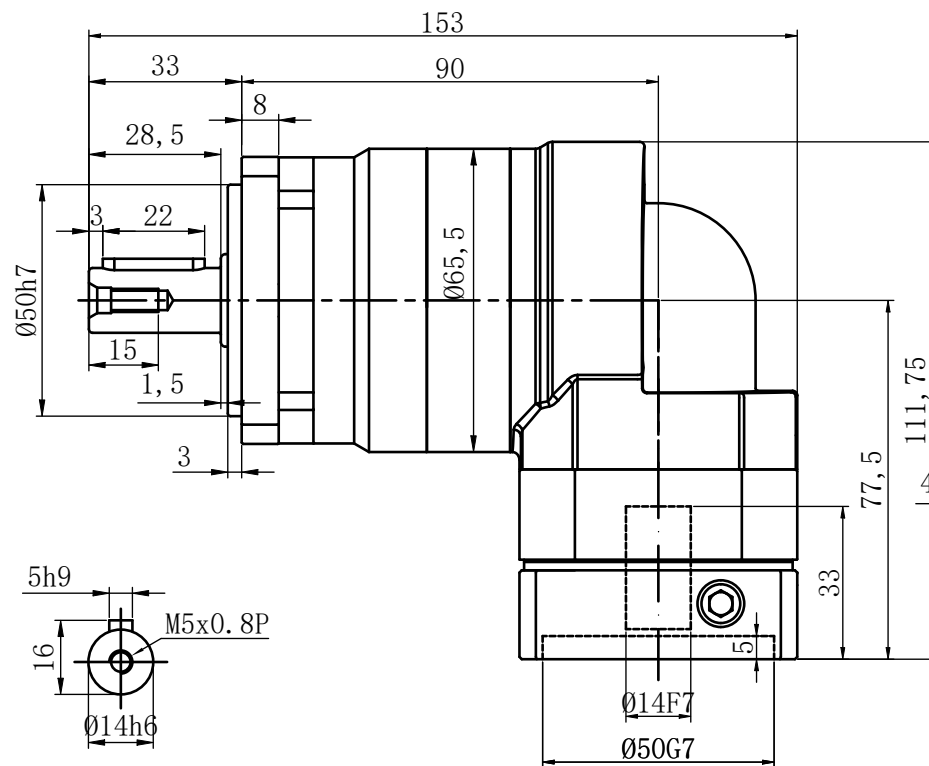

日期

| | | | | | | | | |
|--------------------------------|--------------------------|------------|-------------------------------|------------------|-------------------------|-------------|----------------------|--|
| 客户签字 (Customer's Signature) | 速 比 Ratio | 3-10 | 运转效率 Transmission Efficiency | 97% | 扭转刚性 Torsional Rigidity | 6 Nm/arcmin | 公司名称 Company name |  锋桦® 锋桦传动科技(江苏)有限公司 鋒樺傳動設備(上海)有限公司 台灣 鋒 樺 科 技 有 限 公 司 |
| | 额定扭矩 Rated Torque | 45-55N・m | 精度寿命 Service Life | 20000hrs | 容许径向力Max Radial Force | 460 N | | |
| | 最大扭矩 Max.Torque | 135-165N・m | 噪音 Noise | 63dB | 容许轴向力Max Axial Force | 230 N | 图名 Drawing name | 行星减速机Planetary gearbox: FBR060-L1-S2-P2 |
| | 额定输入转速 Rated Input speed | 3000rpm | 环境温度 Enviromental Temperature | -15° -- +90° | 设计 Design: | 刘建勇 | 服务热线 Service hotline | 400-8040-668 / QQ:4008040668 |
| | 最大输入转速 Max. inputspeed | 5000rpm | 惯量 Inertia | 0.13-0.16kg. cm² | 复核 Recheck: | | 網址/邮箱Website/email | www.fht.tw / www.3fgearmotor.com fht@fht.tw / sales@3fgearmotor.com |
| | 回程间隙 Backlash | ≤11arcmin | 重量 Weight | 0.99Kg | 日期 Date: | 2025/02/15 | 電話/传真Tel./Fax | 021-39948832 / 021-39948836 |